




This 13.56MH RFID card is utilized in such applications as ticketing, library management and anti-counterfeiting.

The 13.56MHz RFID card is designed for use in electronic label applications and electronic article surveillance. It is compliant with the ISO 15693 standard and can be both read and written to and. The lightweight RFID card is utilized in such applications as ticketing, library management and anti-counterfeiting. It supports multi-detection, offers a maximum read rate of 30 tags per second and has a memory capacity ranging from 512 bits to 10kbits for data storage. It is waterproof, dustproof and resistant to immersion in salt water, alcohol, oil, 10% HCL and ammonia.

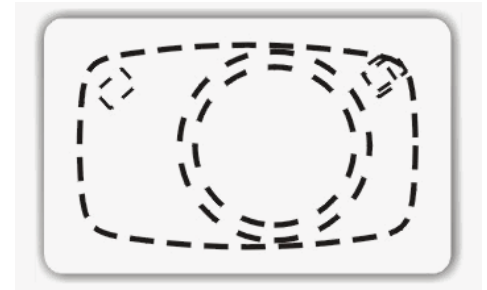

Technical Specifications

Type	Contactless Read/Write
Operating frequency	13.56MHz (HF-High Frequency).
Capacity	512bits to 10kbits
Common usage	Ticketing, library management, anti-counterfeiting
Standard deployment	Electronic label application, electronic article surveillance
Tested read range	Maximum 10cm (Dependant on the reader)
Multi-detection	Yes
Max read quantity	30 labels/sec
Size	43mm x 43mm
Material	Opaque matt paper 79
Color	White
Weight	0.5g
Compliance	ICODE, SLI
Regulatory specifications	ISO 15693
Operating temperature	-25°C to 70°C
Storage temperature	-40°C to 85°C




GAO RFID Inc.

A Member of GAO Group

Celebrating Over 15 Year of Innovation

Product Overview

13.56MHz ISO Dual Frequency RFID Card (113302)

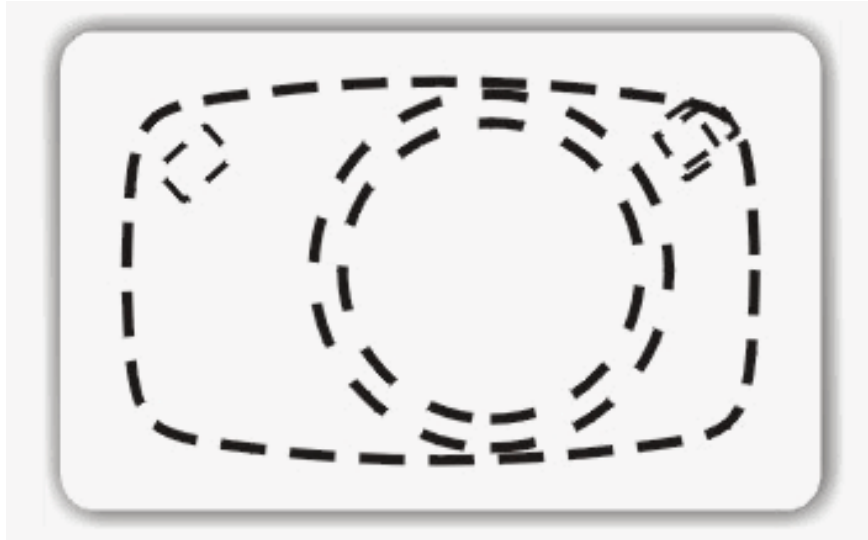

GAO Group

Celebrating Over 15 Years of Innovation

GAORFID.com
GAOTek.com
GAORFIDAssetTracking.com
GAOComm.com
GAOInstruments.com
GAOFiberOptics.com
GAOEmbedded.com
GAOResearch.com

Toll Free (USA & Canada)

1-877-585-9555

All Other Areas

416-292-0038
Dial Ext.601 for Sales
Ext.602 for Other Inquiries

China: 86-519-80691090
86-519-80691089

sales@GAORFID.com