




This passive Gen 2 RFID tag is designed to provide cost-effective and reliable tracking of wooden pallets, one of the main transit item platforms used globally.


This passive Gen 2 RFID Pino tag is suitable for the tagging of trees and identifying wooden items from timber to finished structures. It operates in a frequency range of 865MHz to 928MHz. The RFID tag is compliance with EPC Class 1 Generation 2 communication protocol and offers a long read rang of up to four meters. This ultra-high frequency RFID tag incorporates an NXP XM chip, EPC memory and additional memory for storing user specific information. Furthermore, it survives a wide temperature rang from -20°C to 85°C and performance well even in harsh environments.



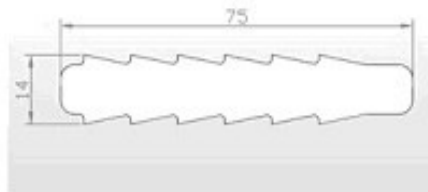

Technical Specifications

Dimensions	75mm x 14mm x 0.3mm; 2.85in x 0.55in x 0.12in
Frequency range	860MHz to 960MHz
Communication protocol	EPC Class 1 Gen 2
Read range	Appr. 4m/13ft
IC an memory size	96 bit EPC+64 bit Impinj Monaco/64/240 bit EPC+512 bit NXP G2XM
Ambient temperature	-20°C to 85°C / -4°F to 185°F
Product is ROHS compliant	

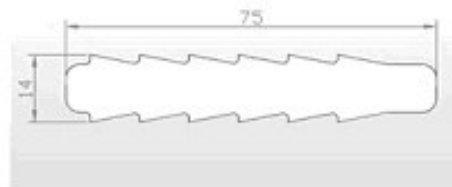




GAO RFID Inc.

A Member of GAO Group

Celebrating Over 15 Year of Innovation

Product Overview

Passive Gen 2 RFID Pino Tag (116404)

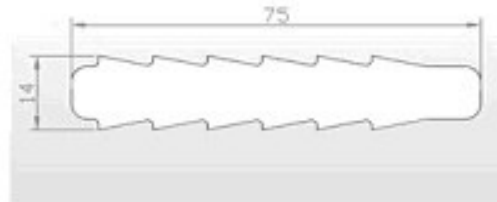

GAO Group

Celebrating Over 15 Years of Innovation

GAORFID.com

GAOTek.com

GAORFIDAssetTracking.com

GAOComm.com

GAOInstruments.com

GAOFiberOptics.com

GAOEmbedded.com

GAOResearch.com

Toll Free (USA & Canada)

1-877-585-9555

All Other Areas

416-292-0038

Dial Ext.601 for Sales
Ext.602 for Other Inquiries

China: 86-519-80691090
86-519-80691089

sales@GAORFID.com