

This standalone keypad access control reader utilizes metal structure and rain resistant design and is well-suited for use in outdoor environments.

This standalone keypad access control reader utilizes metal structure and rain resistant design and is well-suited for use in outdoor environments. It provides several kinds of ways to open the door including card, password, card+password. This all-in-one access control reader offers a memory capacity of 2000 user card info and 2000 user password. It is equipped with doorbell button and interface for connection to any external bell.




Key Features

- ✓ Waterproof and anti-vandal
- ✓ Convenient, safe
- ✓ Completely solves the metal shielding for card reader
- ✓ All-in-one, WG26 output/input
- ✓ Digital backlit buttons
- ✓ User capacity: 2000 user card, 2000 user password
- ✓ Waterproof structure, strong adaptability
- ✓ Three ways to open the door, card, password, card+password
- ✓ Metal structure design, rain-resistant, can be used in outdoor

Technical Specifications

Model	211024-EM	211024-MF
Card type	EM	Mifare
Waterproof degree	IP68	
Environment Humidity	10% to 90%	
Lock output	≤3A	
Working voltage	DC12V±10%	
Static electricity	≤30 mA	
Alarm output	≤20 A	
Output short circuit protection time	≤100 μS	
Card read distance	5 to 8 cm	
Ambient temperature	-45 °C to 60 °C	
Door Opening Time	0 to 99 s(Adjustable)	
Dimension	120×80×25 mm	

Dimension and Weight

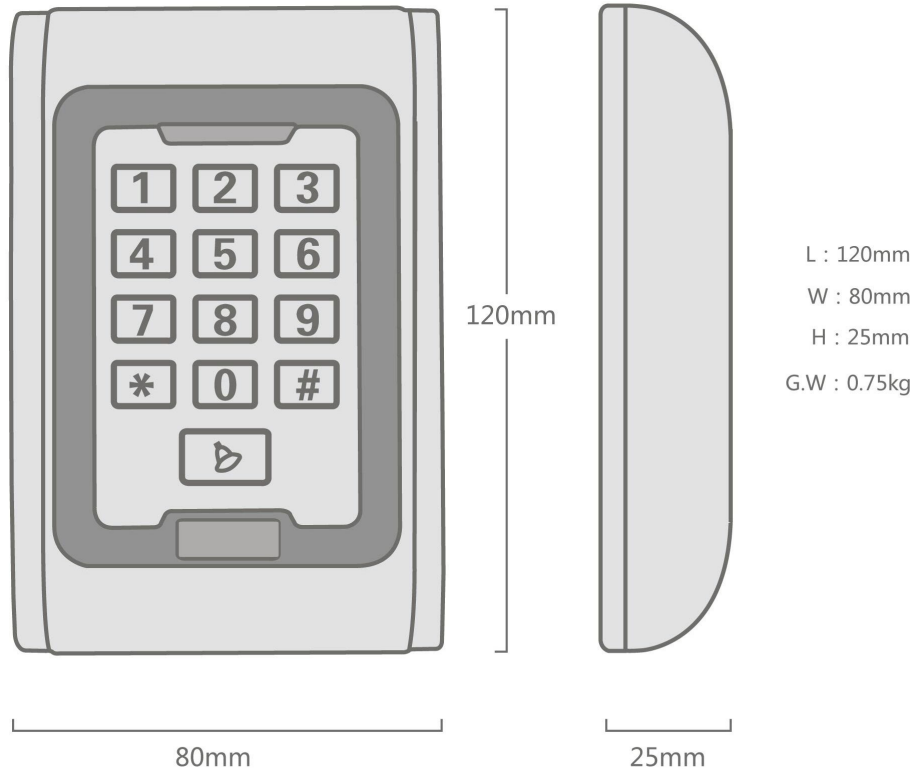

<p>GAO Group</p> <p>GAORFID.com GAOTek.com GAOResearch.com</p>	<p>Toll Free (USA & Canada) 1-877-585-9555</p> <p>All Other Areas 416-292-0038</p> <p>Dial Ext.601 for Sales Ext.602 for Other Inquiries</p> <p>sales@GAORFID.com</p>
---	---