


This ultra high frequency RFID zip tie tag is highly durable and is compliant with ISO/IEC 18000-6C protocol.

This ultra high frequency RFID zip tie tag is highly durable and is compliant with ISO/IEC 18000-6C protocol. It offers a long read range of about 1.2 m. Featuring anti-collision functionality, the tag allow excellent performs well even in dense tag environments. The tag is self-locking and is designed with card buckle and saw to the tie strip resulting a tight binding to any asset.

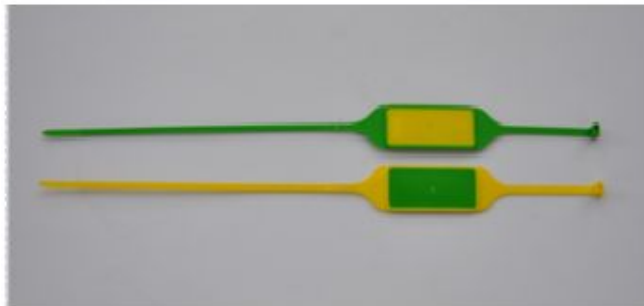

Key Features

- ✓ Compliant with ISO/IEC 18000-6C protocol
- ✓ Anti-collision function
- ✓ Corrosion protection
- ✓ Waterproof
- ✓ Highly durable

Technical Specifications

Material	PP plastics	
Dimension	Size of Label	55mm×20mm×2mm
	Total Length	330mm
Chip	Alien H3 (Other chip types available)	
Operating Frequency	915 MHz (ISO/IEC 18000-6C)	
Operation Temperature	-30 °C to 85 °C	
Identification Distance	Equipment read range: 1-1.2m (reader dependent)	
Tension	180– 200N	
Locking Force	95 – 110N	

<p>GAO Group</p> <p>GAORFID.com</p> <p>GAOTek.com</p> <p>GAOResearch.com</p>	<p>Toll Free (USA & Canada)</p> <p>1-877-585-9555</p> <p>All Other Areas</p> <p>416-292-0038</p> <p>Dial Ext.601 for Sales Ext.602 for Other Inquiries</p> <p>sales@GAORFID.com</p>
---	---